

## JB4 Tuner for 2021+ Maserati MC20 3.0L Nettuno (BETA) Install Guide

Last updated 3/17/2026


Use subject to terms and conditions posted at <https://burgertuning.com/pages/terms>

THIS PART IS LEGAL FOR USE ONLY IN COMPETITION RACING VEHICLES AS DEFINED UNDER CALIFORNIA LAW AND IS NOT LEGAL FOR USE IN ANY OTHER MOTOR VEHICLE. California law defines a "racing vehicle" as "a competition vehicle not used on public highways." (Calif. Health & Safety Code 39048) This part may only be used on competition racing vehicles operated exclusively on a closed course in conjunction with a sanctioned racing event. Competition-only motor vehicles may not be driven to a racing event on a public highway and must be transported on a trailer or other carrier. USE OF THIS PART IN ANY OTHER VEHICLE MAY SUBJECT YOU TO FINES AND PENALTIES FOR VIOLATION OF FEDERAL AND/OR STATE LAW, WILL VOID YOUR WARRANTY FROM BURGER MOTORSPORTS, INC, AND CAN VOID YOUR VEHICLE'S WARRANTY. It is your responsibility to comply with all applicable federal and state laws relating to the use of this part, and Burger Motorsports, INC hereby disclaims any liability resulting from the failure to use this part in compliance with all applicable federal and state laws.




**⚠ ATTENTION: Before starting installation, lock the doors and place the key at least 20 feet away from the vehicle. Wait 10 minutes for the vehicle to go to sleep.**


Remove the plastic engine cover. The cover simply lifts off.

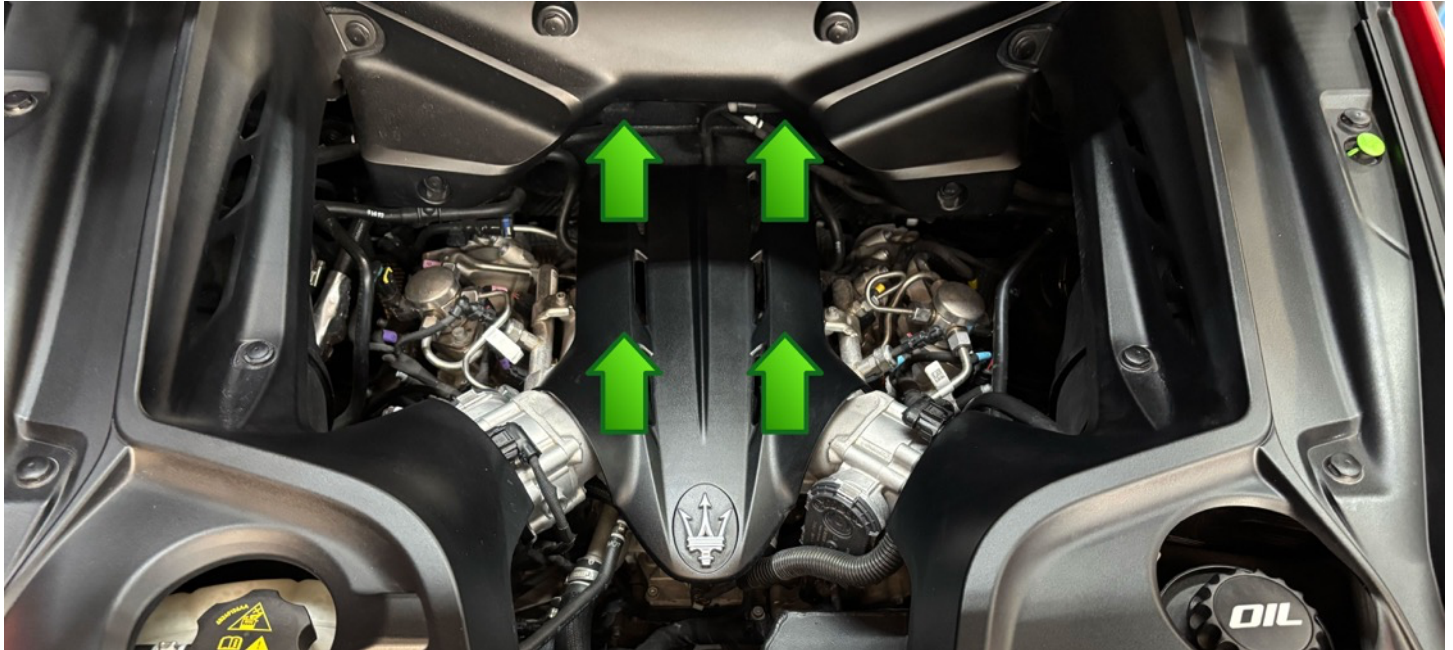

Locate the 4 JB4 connections on top of the engine.

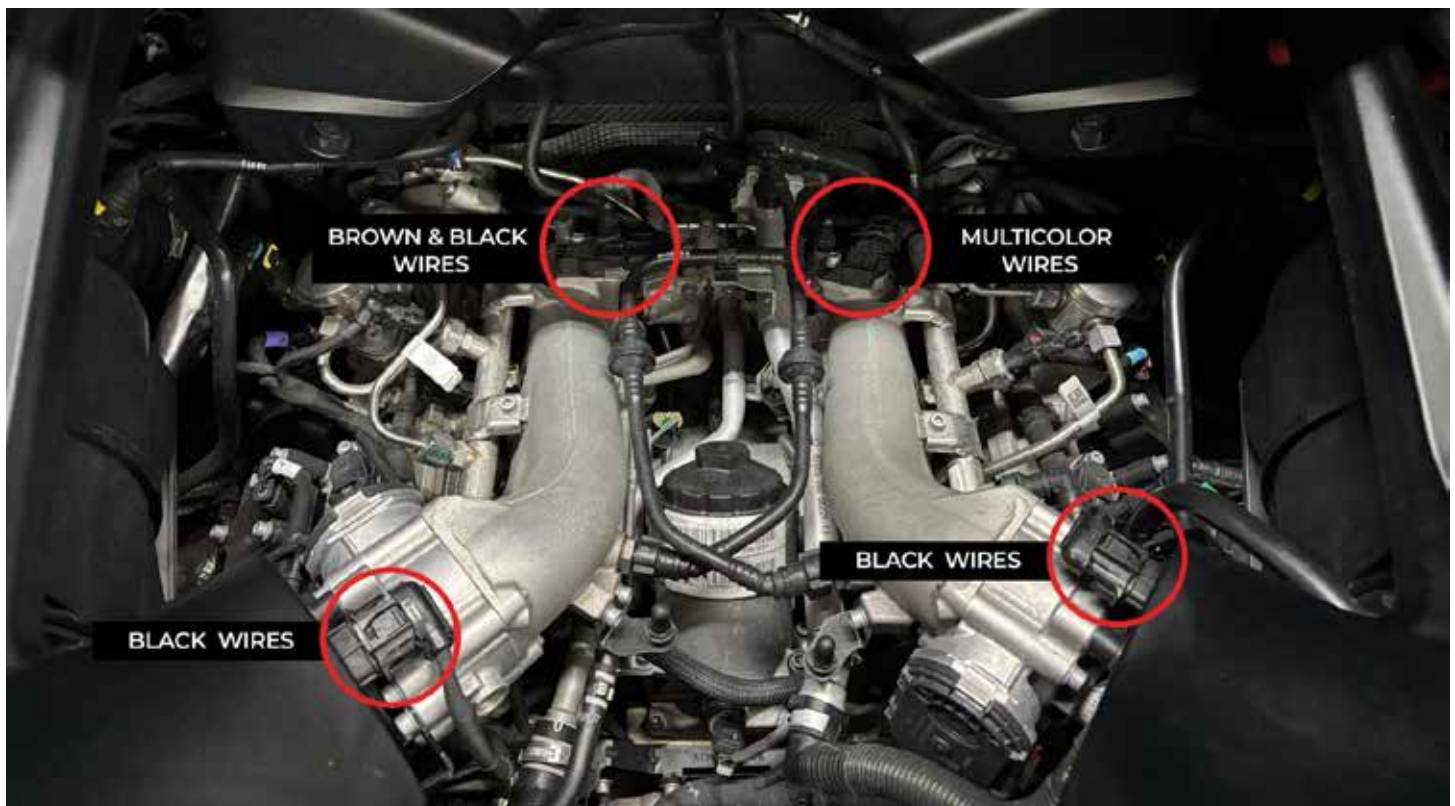

Unplug each sensor's connector by pinching it and pulling it off. Then plug the JB4 connection into the sensor and then into the factory harness.

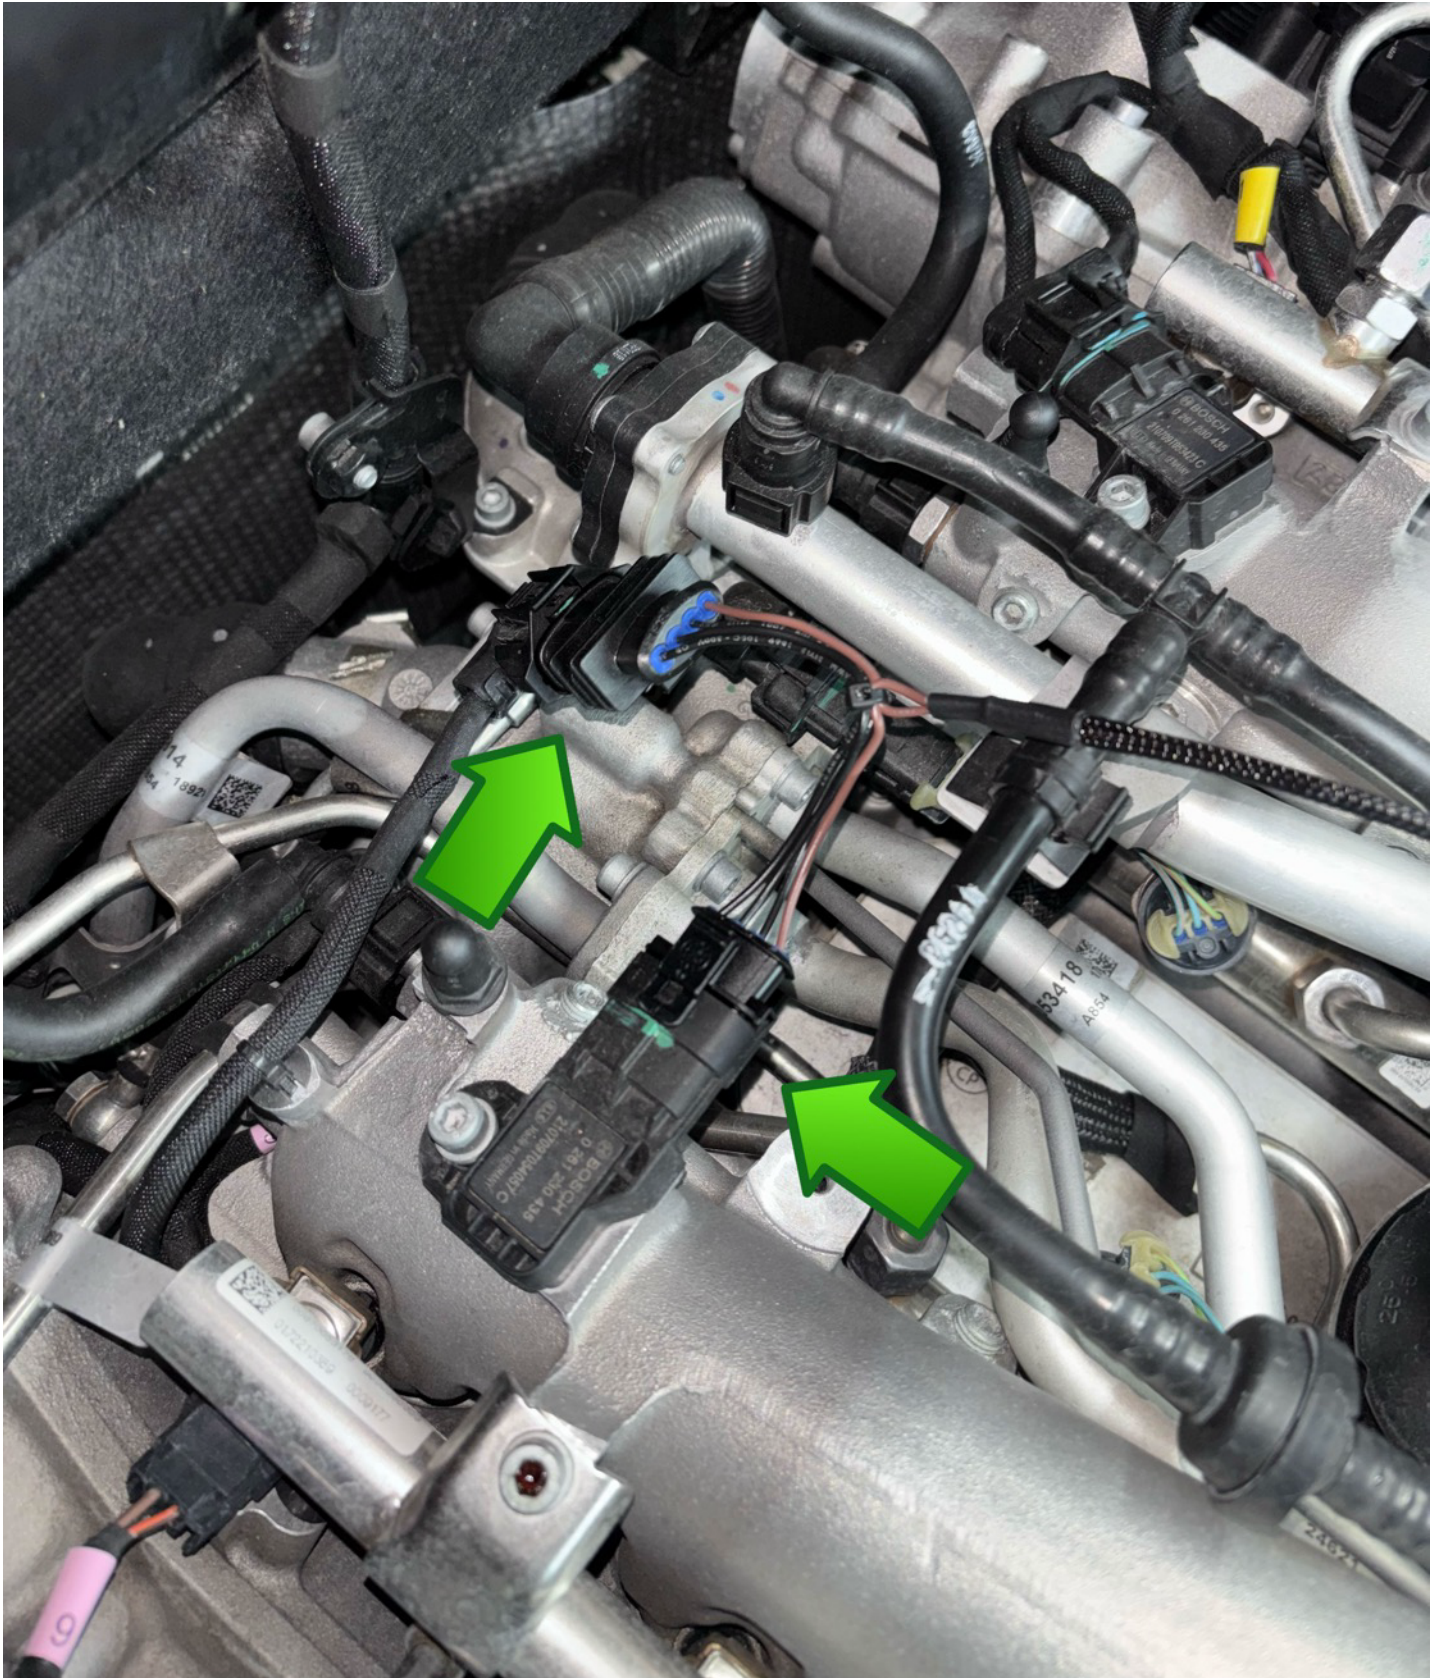

All sensors shown connected to the JB4. Mount the JB4 control unit out of the way and replace the engine cover.



## CANbus/OBDII connector: green/brown wires on JB4


Vehicle can now be unlocked and doors opened, as OBDII can be installed/connected with the vehicle awake. This optional connector attaches to the OBDII, port allowing the JB4 to take in additional advanced engine parameters to incorporate into tuning and logging via the app.



**2 Position Connector (V2)**



The OBDII cable must be run into the passenger compartment and plugged OBDII into JB4 harness, note correct clip over notch orientation. If no data appears in JB4 app once connected, an issue with the OBDII connection is usually the culprit.

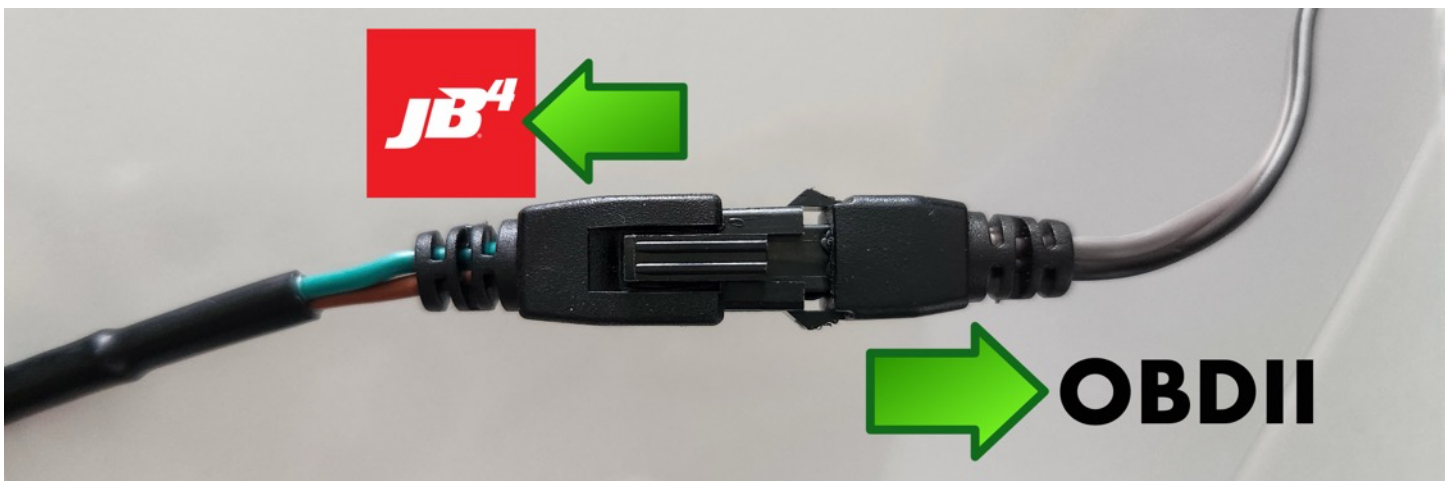





The **JB4PRO App (FREE)** can be downloaded here.

App Store (iOS): <https://apps.apple.com/us/app/jb4-pro/id6746129072>

Play Store (Android): <https://play.google.com/store/apps/details?id=com.burgertuning.jb4pro>

